


# LH5C

# 5.4"

## 5.4 INCH WIRED CAMERA CONTROL MONITOR

Basic Parameters		Turning Off The Screen	Battery Voltage Display /DC Voltage Display	
Screen Size	5.4"			
Color Gamut	85% P3	<b>Input Interface</b>		
Color Depth	10bit(8+2 FRC)	<b>HDMI Input</b>	4K30P HDMI	
Resolution	1920x1152	<b>USB 2.0</b>	Upgrade Firmware / Load 3D LUT	
Dimension	135.1x82.5x22mm	<b>USB 3.0(TYPE-C)</b>	5V Input	
Viewing Angle	178°H/178°V	<b>Support Battery Model</b>	SONY NP-F970/F960/F750/F550	
Brightness	800nits	<b>Camera Control Interface</b>	CAMERA REMOTE	
Contrast Ratio	1000:1			
Weight	178g	<b>Output Interface</b>		
Material	ABS + PC	<b>HDMI Output</b>	1080P 60P	
Input Voltage	NP-F 7~24V	<b>Headphone Jack</b>	3-way 3.5mm Headphone Output	
Maximum Power	7.5W			
Fan	Yes	<b>HDMI Output Function</b>		
Menu Language	English / Traditional Chinese /	UI Output	3D LUT	Anamorphic
	Japanese / Russian / French /	Vertical Extension	Luma Histogram	Output CT
	Spanish / Italian	Rectangle Crop	Check Field	Image Overlay
Operating System	MOVNORM OS	HDR(HLG)		
<b>Software Function</b>		<b>HDMI Input Signal</b>		
Peaking	Zebra	4096×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz		
False Color	Luma Waveform	1920×1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz		
RGB Waveform	Luma Histogram	1920×1080psf@23.97Hz,24Hz,25Hz,29.97Hz,30Hz		
Audio Meters	Rectangle Crop	1920×1080i@50Hz,59.94Hz,60Hz		
Image Capture	Image Overlay	1280×720p@50Hz,59.94Hz,60Hz		
HDR(HLG)	Check Field			
Guides	Cross Hair	<b>HDMI Output Signal</b>		
Grids	Anamorphic	1920×1080p60		
3D LUT	Vertical Extension			
Color Grader	Brightness			
Contrast	Chroma			
Sharpness	Tint			
Color Temperature	Display Flip Mode			
H / V Flip	Low Voltage Display			
Black Level	Gesture Zoom			
Headphone Volume	MIC Volume			

# Product Specification

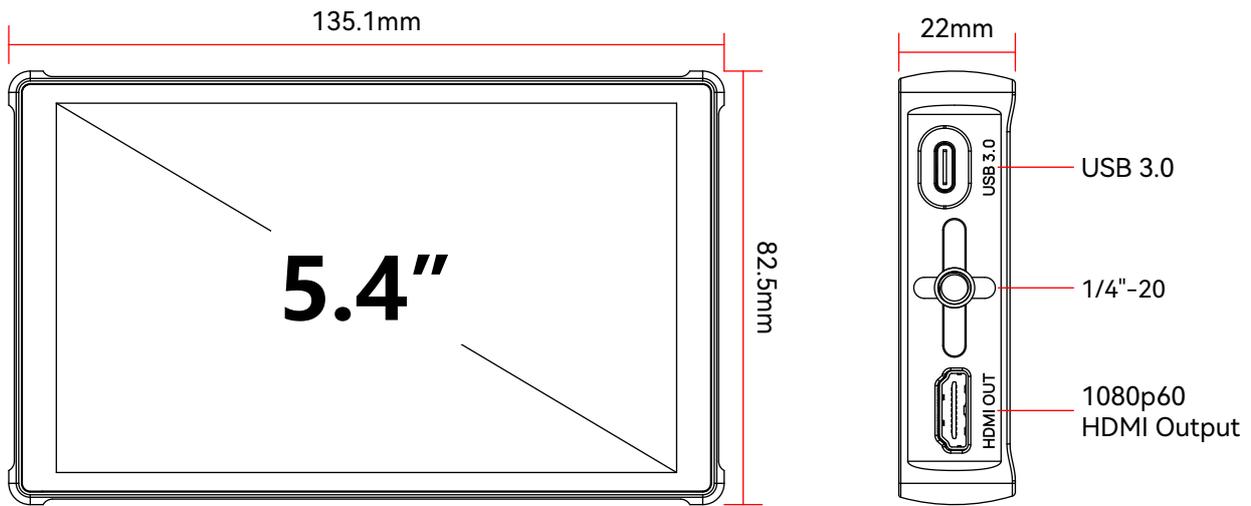

NP-F Battery Plate

